

TNL 18
dynamic

TRAUB



better.parts.faster.

The technical highlights and the new dynamics of the sliding/fixed headstock automatic CNC lathes **TRAUB TNL18** dynamic will give you measurable benefits for your production.

Just take the turrets designed as NC rotary axes, for example. Not only is their indexing extremely fast, they can also be freely positioned without any mechanical locks required. This allows the use of multiple tools, which in turn reduces the chip-to-chip times and increases the tool pool in the work area.

The advantage is that you don't have to do as much setting up, which results in higher productivity.




New solutions open up

new possibilities



TNL18

**Ideal for any
manufacturing task**

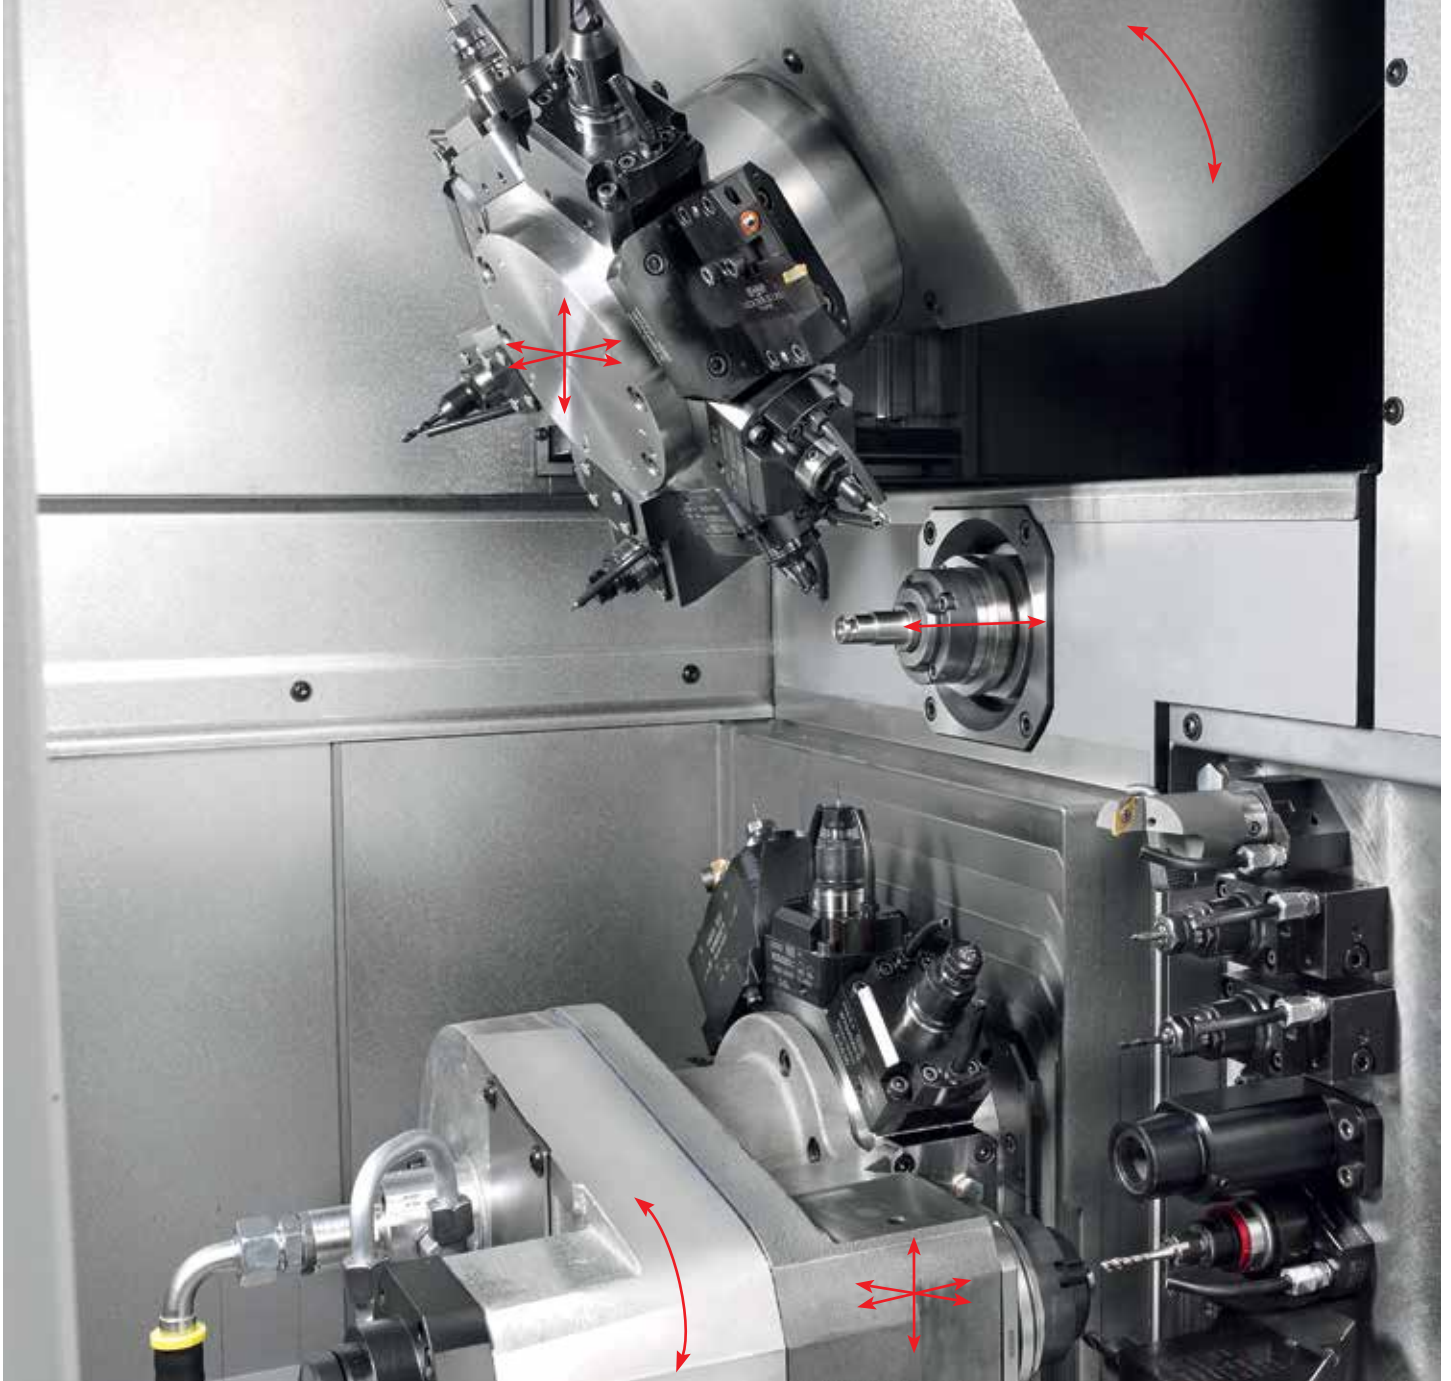

The TNL18 was designed to meet the varied requirements of typical long-turned and short-turned parts.

This design gives you a range of benefits:

- Simultaneous machining with up to 3 tools (each tool with variable feed rate)
- Clearly structured work area with large axis travels and wide tooling circle
- Excellent accessibility through a large sliding cover
- Easy change-over between swiss- and non-swiss turning operation
- Very compact, low footprint

machine design

- Highest precision due to thermal symmetric machine structure

TNL18-7B

The interaction of systems



Main spindle

- Highly dynamic motor spindle in synchronous design
- Fast acting C-axis positioning for short times per piece
- Fluid cooling contributes to thermal stability
- High performance ensures large chip volume
- Smart headstock design with large Z-axis travel allows the turning operation both with and without a guide bush

Top tool carrier

- 8 tool stations
- optional with B-axis
- Powerful tool drive on all stations
- Large X/Y/Z-axis travels
- Turret indexing designed as an NC rotary axis (without mechanical lock) allows positioning at any angle
- Chip-to-chip times comparable to those with a linear tool carrier
- Each station can be equipped with multiple tool holders



Counter spindle with bottom tool carrier

- Powerful counter spindle with large axis travels in the X/Y/Z axes and integrated tool carrier with 7 stations
- Fast acting C-axis positioning
- Spindle positioning in 3 axes results in ultimate transfer accuracy




Rear end machining unit

- 7 tool stations
 - Large travels of counter spindle allow multiple allocations
 - The special drive design provides the choice of high speeds or high torque
 - Integrated work discharge; the part can be flushed or optionally positioned and removed
- spindle allows simultaneous machining on the main spindle with two independent tools

TNL18-9

for even more

flexibility

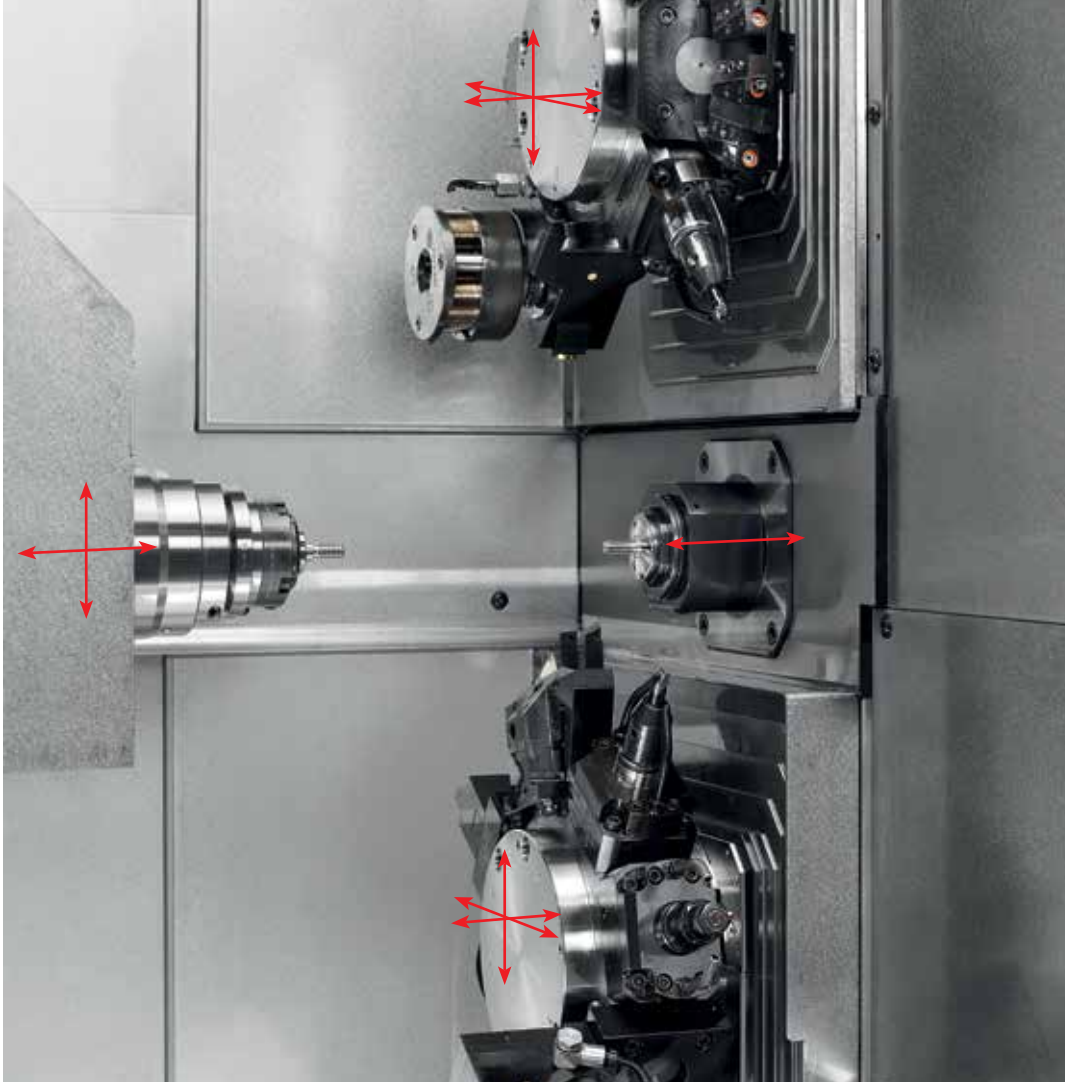

The TNL18-9's enhanced machine concept has an autonomous counter spindle and 9 NC axes.

This concept offers you comprehensive machining options up to a bar clearance of 20 mm.

A counter spindle identical to the main spindle is mounted on a separate X-Z cross-slide, providing a Z travel range of 262 mm.

Here, too, you will benefit from:

- Easy changeover between sliding and fixed headstock operation
- Excellent accessibility through a large sliding cover
- Clearly structured work area with large axis travels
- Turret indexing using an NC rotary axis
- Ultimate precision by thermo-symmetrical machine design

Simultaneous machining using two fast X/Y/Z tool turrets

Two tools are used independently of one another on the main or counter spindle. This enables complex milling contours as well as off-center drill holes to be produced simultaneously to turning operations. Also, the simultaneous use of larger thread rolling heads both on the tool front and reverse side is possible without

any problem at all. The additional X-axis of the counter spindle provides optimal clearance for simultaneous internal machining on the main and counter spindles.




This makes the

tool carriers

so special

Large tool stock

The tooling circle corresponds to remarkable 1225 mm of Y-travel unwrapped, beating any linear tool carrier.

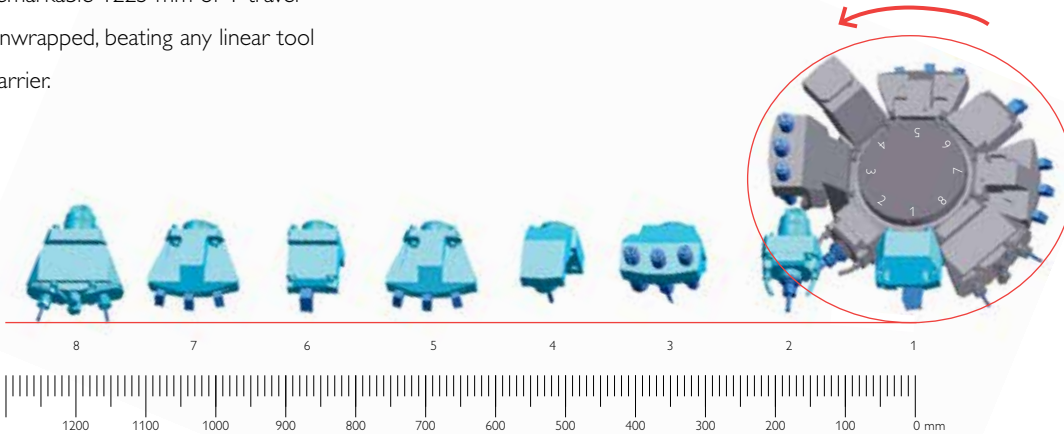


Turret indexing with NC rotary axis

The newly designed tool carriers are a highlight of the TNL18. For the first time, the rotary motion is executed by an NC axis without any mechanical locks. This allows you to position both the turret and the counter spindle very fast at any angle.

Innovative tool mounting system


The new compact shaft system provides significantly higher rigidity, resulting in longer life cycles and improved surface quality.

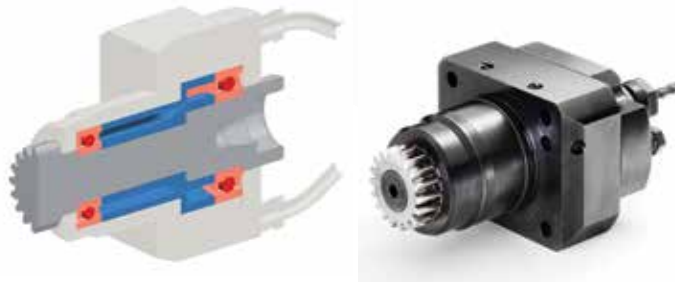

Parts removal

7B-axis variant



Parts discharge through a discharge tube in the back working attachment

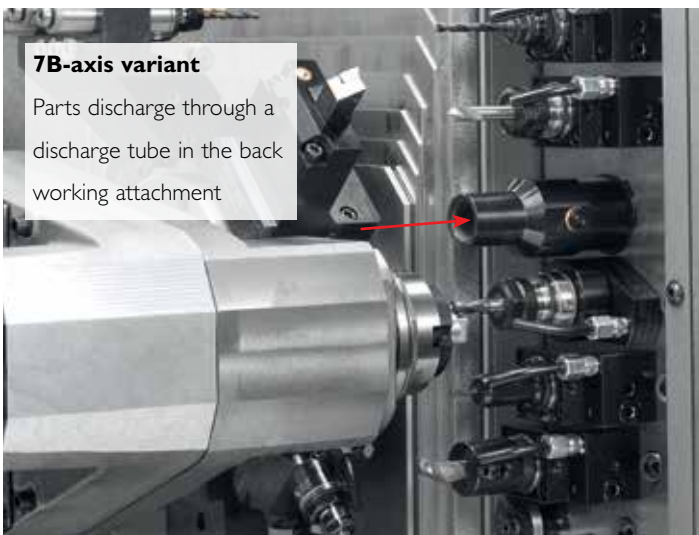

9-axis variant

Parts discharge to the right through machine partition or to the left through the counter spindle




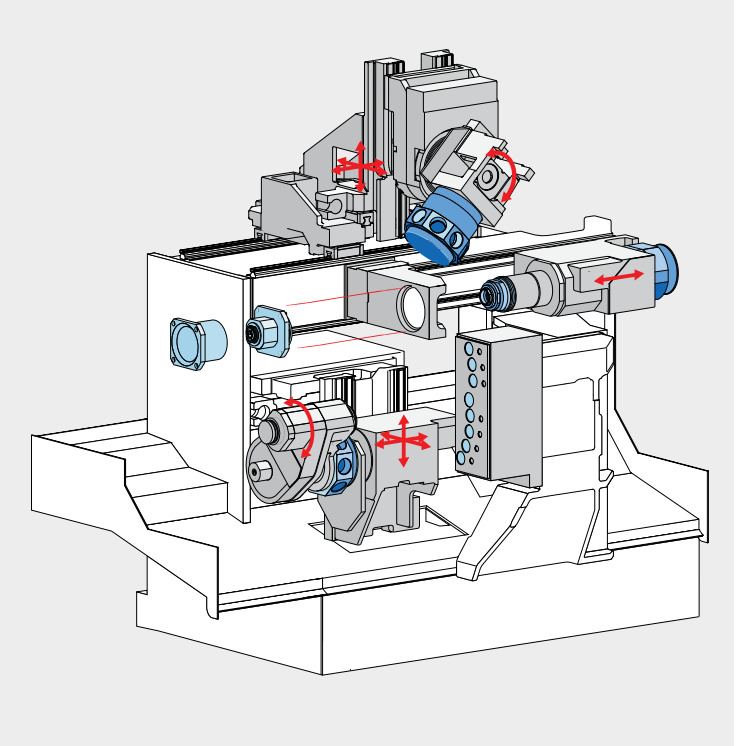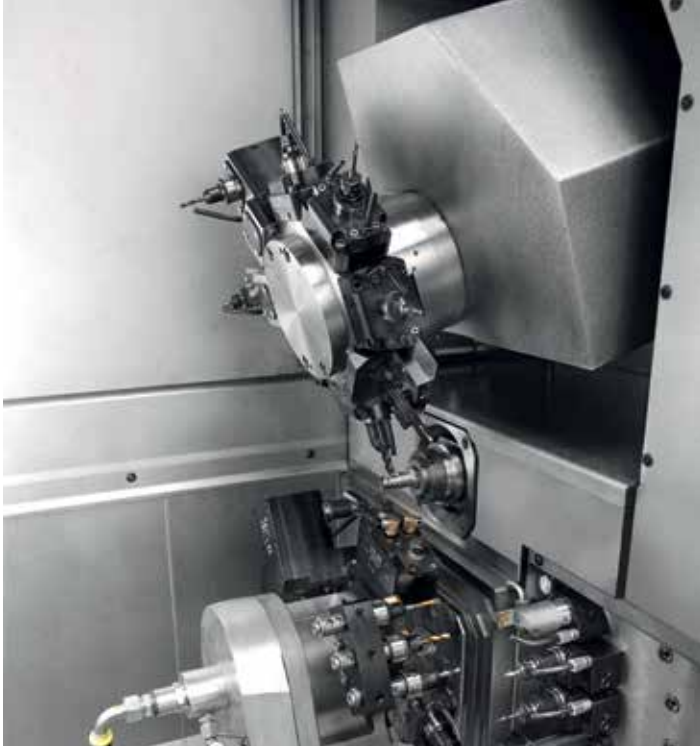

TNL18-7B

Main spindle drive		Motorized spindle
Headstock		
Max. bar capacity		18 (20)
Max. Z1 stroke	swiss - / non-swiss turning center	205 / 80
Counter spindle		with bottom tool
Max. bar capacity		18
Max. X/Z-travel		120 / 250
Top turret		
Stations		8
Axes		X / Y / Z / B / H
Bottom turret		
Stations		7
Axes		X / Y / Z / H
Rear end machining unit		
Stations		7
Number of sub-systems		2
Number of tools		
Maximum simultaneously engaged		3
Number of CNC linear axes		7
Tool pool		22
Max. number of tools	with 3-slot tool holders	52
Tool shank Ø turret		45
Tool shank Ø rear end mach. unit		36

The variants,
as diverse as your
requirements

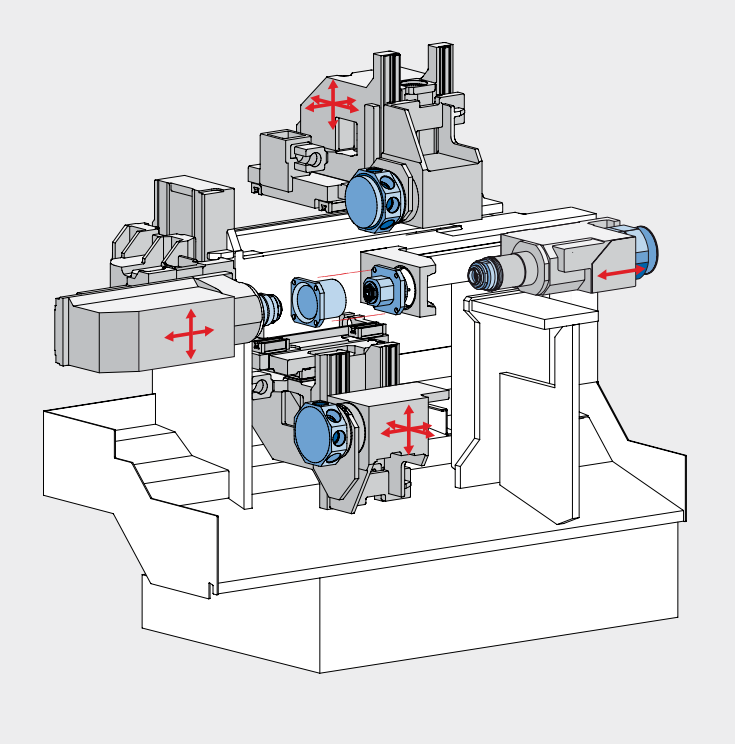

TNL18-9

Main spindle drive		Belt spindle
Headstock		
Max. bar capacity		20
Max. Z1 stroke	swiss - / non-swiss turning center	205 / 80
Counter spindle		autonomous
Max. bar capacity		20
Max. X/Z-travel		100 / 262
Top turret		
Stations		8
Axes		X / Y / Z / H
Bottom turret		
Stations		8
Axes		X / Y / Z / H
Number of sub-systems		3
Number of tools		
Maximum simultaneously engaged		2
Number of CNC linear axes		9
Tool pool		16
Max. number of tools		48
with 3-slot tool holders		
Tool shank Ø turret		45

Simultaneous machining on the main spindle

- Turning, milling, cross-drilling
- Headstock function
- Thread chasing without material return through the autonomous Z-axis



Sample applications for variants -7B, -9




Highly accurate and complex rear end machining

- Precise pick-up position programmable
- Three-axis rear end machining for parts with complex geometry
- Up to 3 tools being used simultaneously



Sample applications for variants -7B

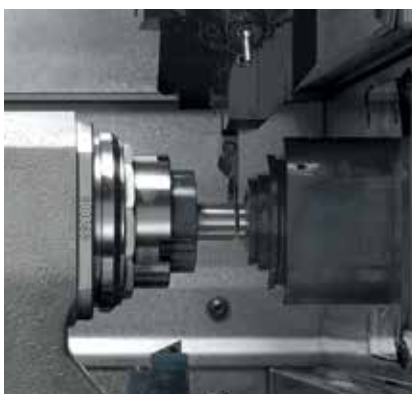

Brilliant for a broad part

spectrum – from simple


to highly complex

The additional machining capabilities of the B-axis

- Contour machining with precise tool position
- Production of inclined holes and surfaces with standard tool holders
- Line-by-line milling of complex contours



Sample applications for the -7B variant

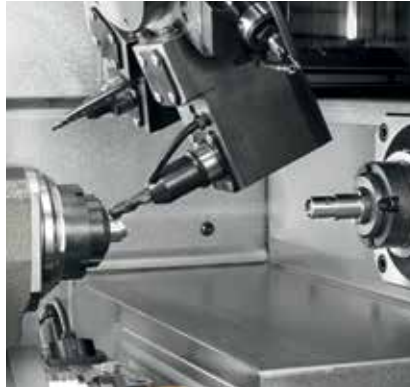

Simultaneous machining with two tool turrets

- Turning, milling, cross-drilling
- X-axis in the counter spindle ensures large clearance with simultaneous internal machining on the main and counter spindle
- Use of larger thread rolling heads

Parts discharge through the counter spindle

- Particularly well-suited for very long parts



Sample applications for the -9 variant



CNC control

Clearly arranged user interface with dialog technology for programming, editing, setup and operation

- 15" Multitouch display for the use of touch functions with gesture technology or menu operation using buttons
- Ideally equipped for Industry 4.0 – easy integration of the machine into the manufacturing environment
- Online retrieval of manufacturing and setup information; remote access via VNC
- Graphics-supported interactive guidance also during setup
- Comfortable process synchronization and optimization of the program sequences of parallel machining processes
- Visual control to avoid collision situations through graphical process simulation
- Highly sensitive tool breakage monitoring



Diagnostic features


- Ongoing recording of relevant analog and digital signals and data; their flow can be displayed and compared with other recordings at any time.
- Alarm messages with detailed clear-text information
- Quick location and elimination of cause of malfunction



TRAUB TX8i-s V7

Get a firm grasp

on your production

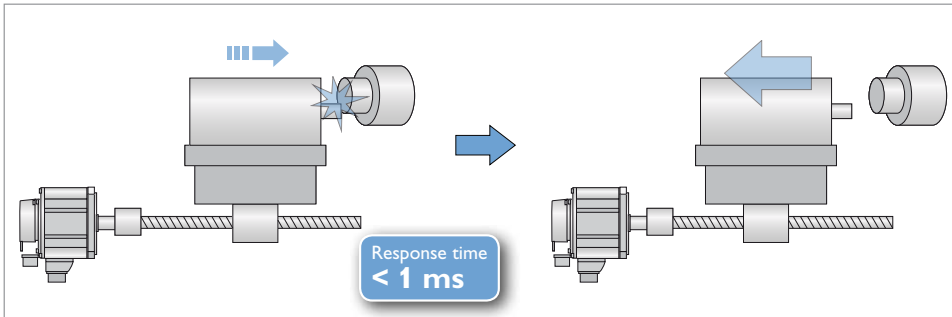


Electronic quick retraction

Additional safety device –

Electronic quick retraction

- Active on all TRAUB machines
- Active counter control in case of malfunction
- Response time in the millisecond range by intelligent servo amplifier
- More effective than mechanical safety systems

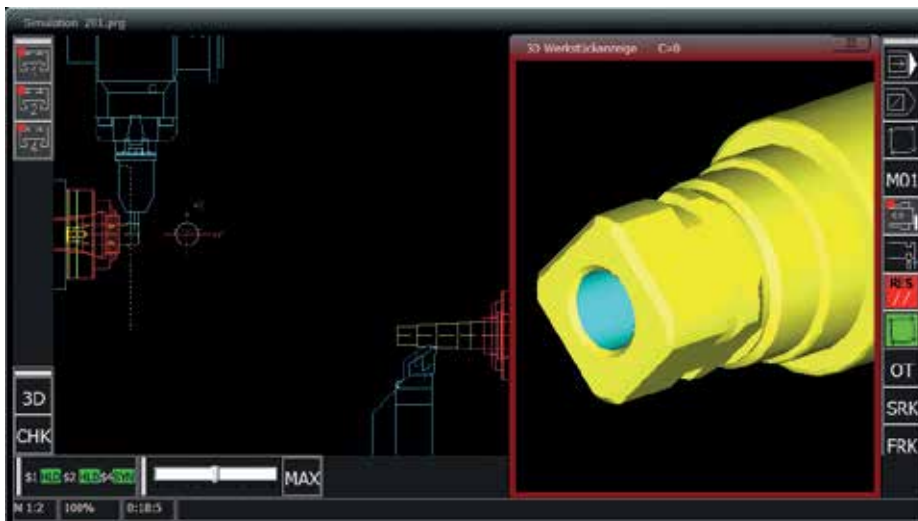

Programming, optimization, simulation

- Realistic real-time simulation for shorter setup times
- 3D workpiece display as standard feature
- Graphical display of the working sequences
- Visual collision check before the machine is run in


External programming

TRAUB WinFlexIP^{Plus} (option)

- Step-by-step parallel programming and simulation possible
- Extremely easy synchronization of machining sequences with 2 sub-systems
- Cycle-time optimization already during programming
- Planning and optimization of the setup operation using “Manual mode” and “Automatic mode” functions corresponding to the real machine
- 3D simulation and calculation check provide additional safety
- Optionally as PC version and / or integrated in the control
- 3D collision protection during setup operation of the machine.



Work area:TNL18-7B

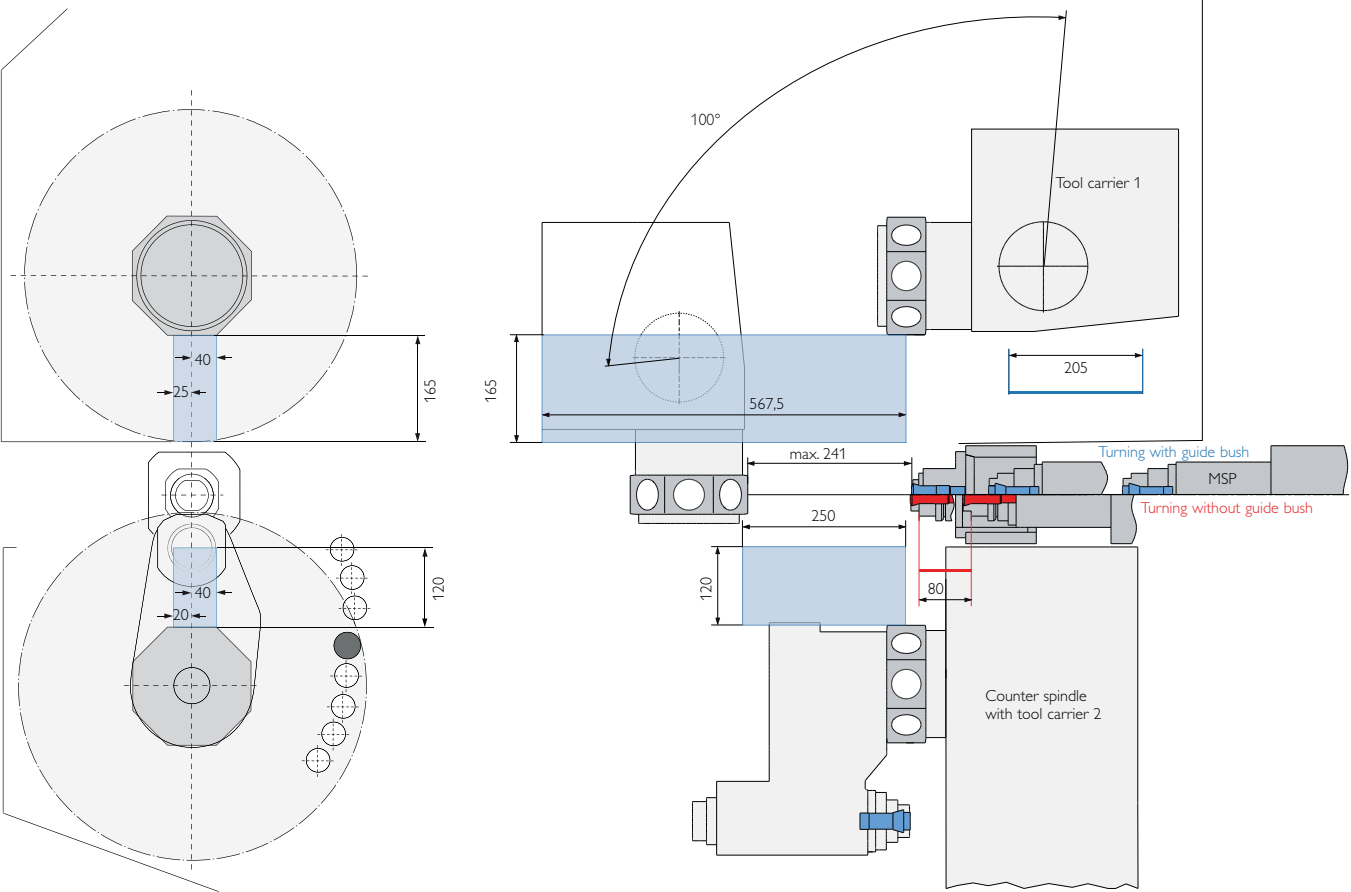


Technical data


TNL18-7B		
Headstock		
Max. bar capacity	mm	18 (20)
Max. Z-travel Swiss- and non-swiss turning center	mm	205 / 80
Max. speed	rpm	12000
Power at 100%/40%	kW	3.0 / 5.5
Torque at 100%/40%	Nm	5.7 / 10.5
C-axis resolution	Degrees	0.001
Max. rapid traverse rate Z	m/min	42
Top tool turret		
Tool mountings	Number	8
Driven tools	Number	8
Max. speed	rpm	12000
Power at 100%/40%	kW	1 / 2
Mounting-ø	mm	45
Turning tool cross-section	mm	16 x 16 / 12 x 12
Slide travel X	mm	165
Slide travel Y	mm	-40 / +25
Slide travel Z	mm	550
Rapid traverse rate X / Y / Z	m/min	20 / 20 / 42
Swivel angle B	Degrees	100
Bottom tool turret		
Tool mountings	Number	7
Driven tools	Number	7
Max. speed	rpm	12000
Power at 100%/40%	kW	1.5 / 2.5
Mounting-ø	mm	45
Drehmeißelquerschnitt	mm	16 x 16 / 12 x 12
Slide travel X	mm	120
Slide travel Y	mm	-20 / +40
Slide travel Z	mm	250
Rapid traverse rate X / Y / Z	m/min	21 / 21 / 50
Counter spindle		
Max. clamping depth / diameter	mm	175 / 20
Max. speed	rpm	12000
Power at 100%/40%	kW	1.5 / 2.5
Torque at 100%/40%	Nm	3 / 5.1
C-axis resolution	Degrees	0.001
Rear end machining unit		
Tool mountings	Number	7
Driven tools	Number	3
Max. speed	rpm	10000
Power at 100%/25%	kW	1 / 2
Mounting-ø	mm	36
Cooling lubricant unit		
Basic unit		
Pump pressure	bar	3 / 8
Tank capacity	l	500
Pump capacity 3 / 8 bar	l/min	80 / 100
Filter fineness	µm	50
Medium pressure (option)		
Pump pressure	bar	20
Pump capacity	l/min	28
Filter fineness	µm	50
Hydraulic unit		
Tank capacity	l	11
Machine dimensions		
Length x width x height	mm	3060 x 1480 x 2420
Weight up to approx.	kg	4300 *
Connecting power	kW	24

* Depending on equipment

Work area:TNL18-9

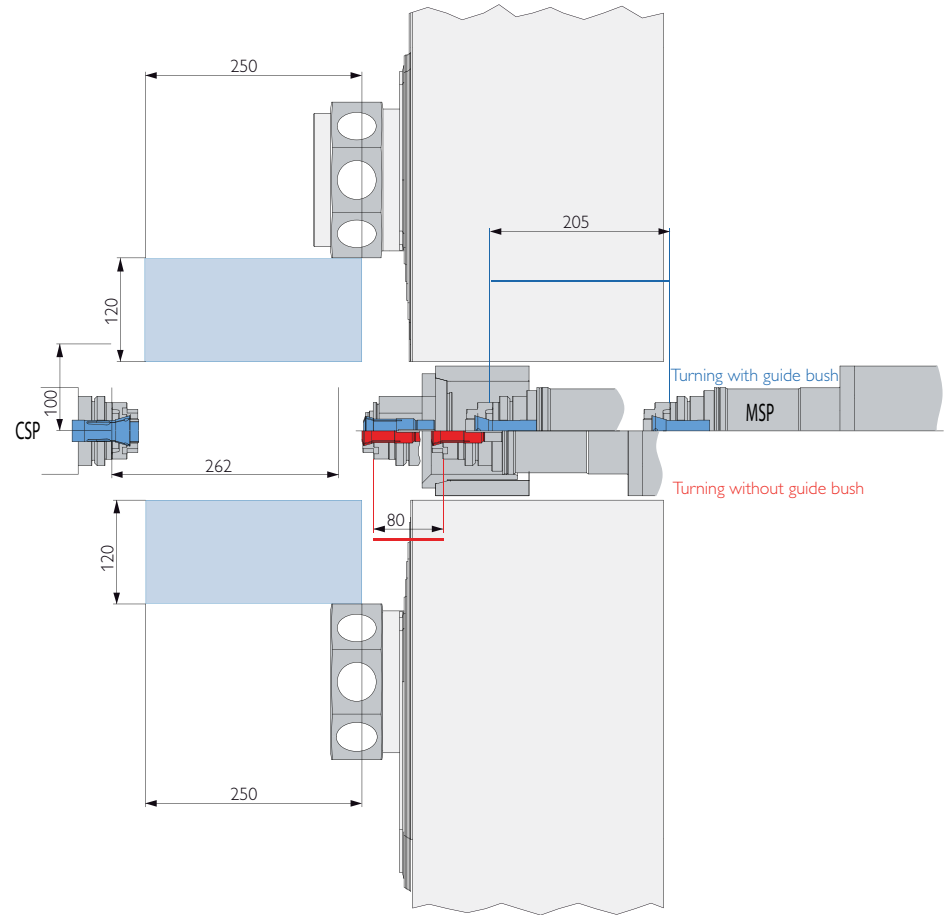

Installation plan for all variants:
in the basic design

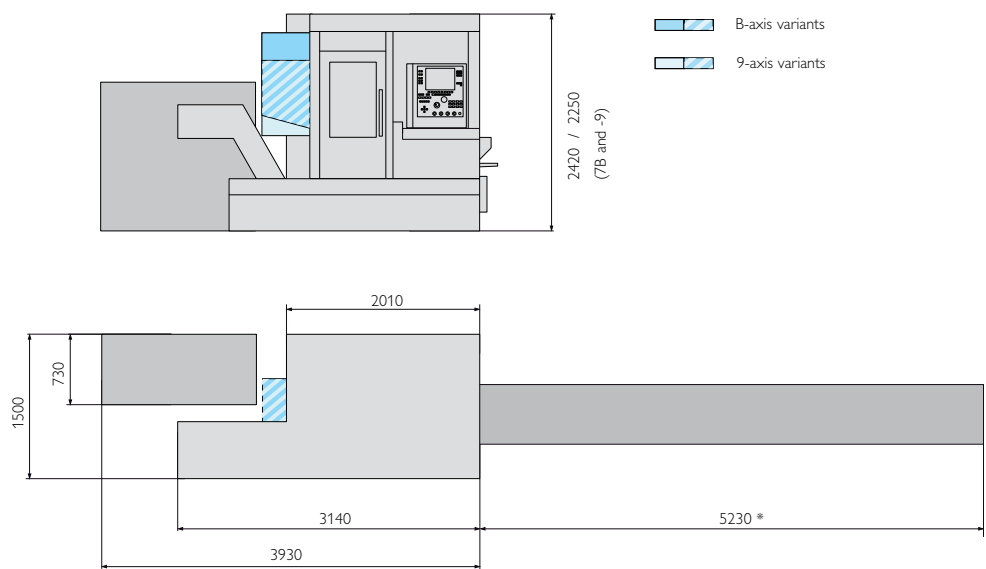

* Contour and length depend on loading magazine

Technical data

TNL18-9		
Headstock		
Max. bar capacity	mm	20
Max. Z-travel <i>Swiss- and non-swiss turning center</i>	mm	¹⁾ 205 / 80
Max. speed	rpm	10500
Power at 100%/40	kW	2.2 / 3.7
Torque at 100%/40%	Nm	14 / 23,5
C-axis resolution	Degrees	0.001
Max. rapid traverse rate Z	m/min	42
Top tool turret		
Tool mountings	Number	8
Driven tools	Number	8
Max. speed	rpm	12000
Power at 100%/40%	kW	1 / 2
Mounting-ø	mm	45
Turning tool cross-section	mm	16 x 16 / 12 x 12
Slide travel X	mm	120
Slide travel Y	mm	-40 / +25
Slide travel Z	mm	250
Rapid traverse rate X / Y / Z	m/min	21 / 21 / 50
Bottom tool turret		
Tool mountings	Number	8
Driven tools	Number	8
Max. speed	rpm	12000
Power at 100%/40%	kW	1 / 2
Mounting-ø	mm	45
Turning tool cross-section	mm	16 x 16 / 12 x 12
Slide travel X	mm	120
Slide travel Y	mm	-20 / +40
Slide travel Z	mm	250
Rapid traverse rate X / Y / Z	m/min	21 / 21 / 50
Counter spindle		
Max. bar capacity	mm	20 (18 *)
Max. speed	rpm	10500
Power at 100%/40%	kW	2.2 / 3.7
Torque at 100%/40%	Nm	14 / 23,5
Slide travel X	mm	100
Slide travel Z	mm	262
C-axis resolution	Degrees	0.001
Rapid traverse rate X / Z	m/min	21 / 42
Cooling lubricant unit		
Basic unit		
Pump pressure	bar	3 / 8
Tank capacity	l	500
Pump capacity 3 / 8 bar	l/min	80 / 100
Filter fineness	µm	50
Medium pressure (option)		
Pump pressure	bar	20
Pump capacity	l/min	28
Filter fineness	µm	600
Hydraulic unit		
Tank capacity	l	11
Machine dimensions		
Length x width x height	mm	3060 x 1460 x 2250
Weight up to approx.	kg	4000 **
Connecting power	kW	24

* Discharging through the counter spindle

** Depending on equipment

1) The headstock stroke depends on the clamping device being used

BRAZIL // Sorocaba

INDEX Tornos Automaticos Ind. e Com. Ltda.
Rua Joaquim Machado 250
18087-280 Sorocaba - SP
Phone +55 15 2102 6017
vendas@indextornos.com.br
www.indextornos.com.br

CHINA // Shanghai

INDEX Trading (Shanghai) Co., Ltd.
No. 18 Gu Fang Rd
Shanghai 201102
Phone +86 21 54176637
info-shanghai@indextraub-china.com
www.index-traub.cn

CHINA // Dalian

INDEX DALIAN Machine Tool Ltd.
17 Changxin Road
Dalian 116600
Phone +86 411 8761 9788
dalian@index-traub.com
www.index-traub.cn

DENMARK // Langeskov

INDEX-TRAUB Danmark
Havretoften 1
5550 Langeskov
Phone +45 65993401
t.frydensberg@index-traub.dk
www.index-traub.dk

GERMANY // Esslingen

INDEX-Werke GmbH & Co. KG Hahn & Tessky
Plochingen Straße 92
73730 Esslingen
Phone +49 711 3191-0
info@index-werke.de
www.index-werke.de

GERMANY // Deizisau

INDEX-Werke GmbH & Co. KG Hahn & Tessky
Plochingen Straße 44
73779 Deizisau
Phone +49 711 3191-0
info@index-werke.de
www.index-werke.de

GERMANY // Reichenbach

INDEX-Werke GmbH & Co. KG Hahn & Tessky
Hauffstraße 4
73262 Reichenbach
Phone +49 7153 502-0
info@index-werke.de
www.index-werke.de

FINLAND // Helsinki

INDEX-TRAUB Finland
Hernepellontie 27
00710 Helsinki
Phone +35 8 108432001
pekka.virkki@index-traub.fi
www.index-traub.fi

FRANCE // Paris

INDEX France Sarl
Avenue du Québec / Z.A. de Courtabœuf
91941 Les Ulis Cedex
Phone +33 1 69187676
info@index-france.fr
www.index-france.fr

FRANCE // Bonneville

INDEX France Sarl
399, Av. de La Roche Parnale
74130 Bonneville Cedex
Phone +33 4 50256534
info@index-france.fr
www.index-france.fr

NORWAY // Oslo

INDEX-TRAUB Norge
Postbox 2842
0204 Oslo
Phone +47 4695 8385
a.stjepic@index-traub.no
www.index-traub.no

SWEDEN // Stockholm

INDEX-TRAUB Nordic AB
Fagerstagatan 2
16308 Spånga
Phone +46 8 505 979 00
h.sars@index-traub.se
www.index-traub.se

SLOVAKIA // Malacky

INDEX-Werke GmbH & Co. KG Hahn & Tessky
Vínohrádok 5359
Malacky 901 01
Phone +34 654 9840
info@index-werke.de
www.index-traub.com

UNITED STATES // Noblesville

INDEX Corporation
14700 North Point Boulevard
Noblesville, IN 46060
Phone +1 317 770 6300
sale@index-usa.com
www.index-usa.com

The logo for INDEX TRAUB. The word "INDEX" is in a bold, teal, sans-serif font. Below it, the word "TRAUB" is in a bold, red, sans-serif font, with a red curved line arching over the letters "A" and "U".

**INDEX-Werke GmbH & Co. KG
Hahn & Tessky**

Plochingen Straße 92
73730 Esslingen

Phone +49 711 3191-0
Fax +49 711 3191-587
info@index-werke.de
www.index-werke.de

better.parts.faster.